


SOP Title:	Accessing Sulfuric Acid Addition/Dilution Sites - Personal Monitor (hazardous gas may be present)
Division/Area:	Leaching/Hydromet/Crush and Convey

4500 STARGO:

This whole bowl area is identified as personal monitor usage due to the fact that it is a low lying area and the gases are heavier than air.

Evacuation route taken should be following red arrows around the structure through open paths of travel, not up and over pipelines.

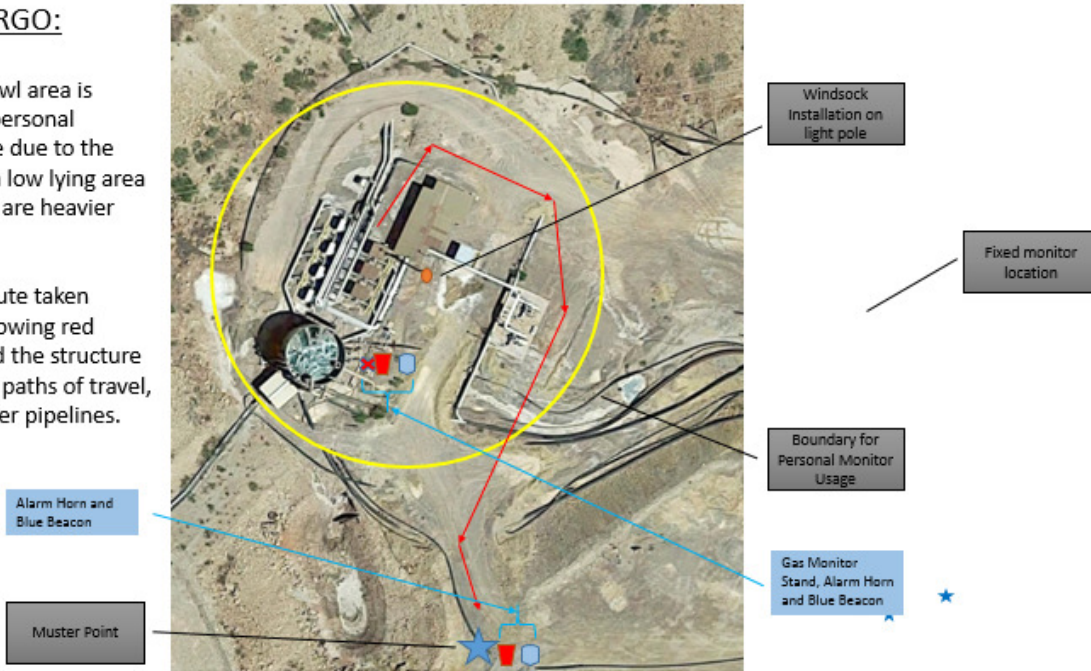

Ponderosa:

The area with the pumps is lower than the tank and should be included in the evacuation if the fixed monitor is alarming.

